

AquaKinetic Omekšivač vode

AquaKinetic HT, AquaKinetic HF



Visoko efikasni, ultrakompaktni omekšivač vode, AquaKinetic može da se smesti i u najmanje prostore.

- Omekšivač vode sa dva pumpe, radi bez električnog napajanja
- Ekonomičan za upotrebu, dostupan i sa opcijom točkića koji omogućavaju jednostavno rukovanje, posebno tokom čišćenja.



Brzo
povezivanje/
Jednostavna
instalacija



Lako uklopiv
ispod radne
površine/stola



Kompaktan
dizajn



So u blokovima



Visoka efikasnost



Na točkićima




Izdržljivo
kućište



Visok protok
vode

Specifikacije:

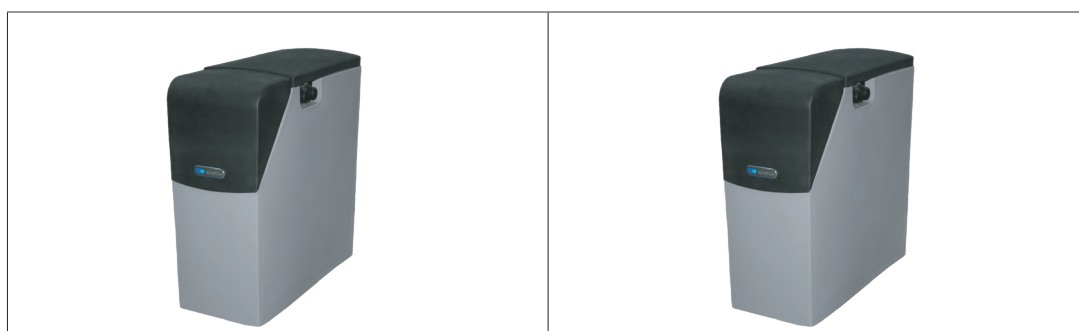

Proizvod	AquaKinetic HT	AquaKinetic HF
Dimenzije		
Širina	178 mm	178 mm
Dubina	457 mm	457 mm
Visina	508 mm	508 mm
Težina	21 kg	21 kg
Ciklus regeneracije	°dH L	°dH L
1	4 2280	4 2280
2	8 1140	8 1103
3	11 760	11 736
4	15 570	15 552
5	19 456	19 441
6	22 378	22 368
7	25 325	25 315
8	29 285	29 276
Performanse		
Minimalni protok	2 l/min	2 l/min
Maksimalni protok @ 1 Δ bar	19,3 l/min	19,3 l/min
Tvrdoća u CaCO ₃ (max)	513 mg/l	513 mg/l
Regeneracija		
Upotreba soli / Kapacitet	0,45 / 9 kg	0,45 / 9 kg
Vreme	11 minuta	11 minuta
Potrošnja vode	34 litra	24 litra
Sistem		
Jonska masa	2 x 4,5 litra	2 x 4,5 litra
Ulaz/izlaz priključak	U pakovanju	U pakovanju
Temperatura vode	2 - 65°C	2 - 49°C
Ulazni pritisak (Min/Max)	2 / 8,6 bar	2 / 8,6 bar



Kinetico International Division, Sandvadsvej 7, Koge, DK - 4600

www.kineticopro.eu